



PUSHROD ORDER FORM

Please fill out this PDF form using Acrobat Reader. Save and print for your records and then email to orders@pushrods.net or FAX to 541 389 8840.

The following information is required to determine your specific pushrod needs and to process your order for shipment. In certain applications, a sample pushrod may be required to determine the correct dimensions for both length and end type. Custom pushrods are made to order and may be eligible for up to 50% credit, at our discretion.

Check if Billing is same as Shipping Address

Name _____

Shipping Address _____ Billing Address _____

City _____ State _____ ZIP _____ City _____ State _____ ZIP _____

Contact # _____ FAX# _____

Credit Card Number _____ Expiration Date _____ CID # (3 digit code on back of card) _____

Email Address (optional) _____

Shipping: UPS Ground UPS 3-Day UPS 2-Day UPS Next Day Priority Mail (shipped following day)

Engine (Make, Year, Cu. In.) _____

Open Valve Spring Pressure _____ Rocker Brand / Type _____ Tube Diameter _____

Will Guideplates Be Used? Yes No Oil Holes In Ends? Yes No Straight Wall Single Taper Double Taper


Use part number chart on page 2 to determine part number for your application:

Part # _____ Length _____ OA* EL** Qty _____

Part # _____ Length _____ OA* EL** Qty _____

* OA = Over All (top of cup)
** EL = Effective Length (from bottom of cup)

Place "X" in box for your type of pushrod:

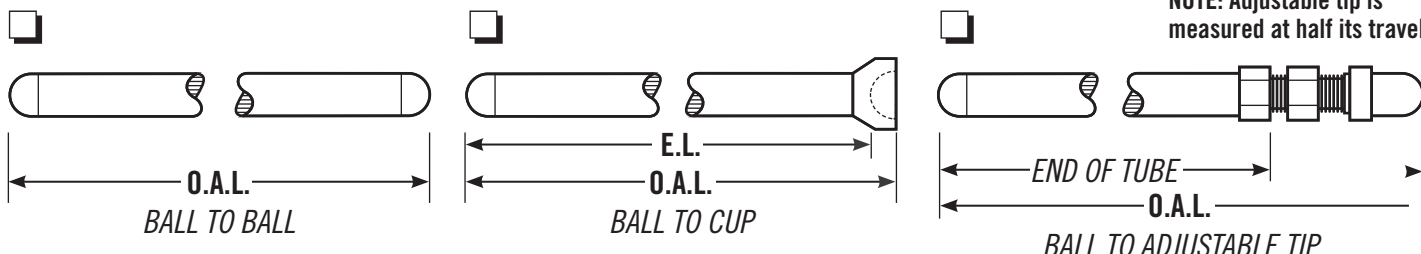

Tube diameters are as follows: 5/16 • 3/8 • 7/16 • 1/2 • 9/16 • 5/8 in 4130 Chromoly. Your open spring pressure determines what wall thickness is required. 5/16 and 3/8 2024 T-3 aluminum and 3/8 x.042 titanium are also available.

SMITH BROTHERS PUSHRODS
800 367 1533 | FAX 541 389 8840 | EMAIL orders@pushrods.net
pushrods.net